

# UTILITY PATENT APPLICATION TRANSMITTAL

*Only for new nonprovisional applications under 37 CFR 1.53(b)*

Attorney Docket No.

1263.1195

First Named Inventor or Application Identifier

RICHARD IAN TAYLOR

Express Mail Label No.

## APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:

Assistant Commissioner for Patents  
Box Patent Application  
Washington, DC 20231

1. ☐ Fee Transmittal Form  
(Submit an original, and a duplicate for fee processing)

2. ☒ Specification Total Pages

3. ☒ Drawing(s) (35 USC 113) Total Sheets

4. ☒ Oath or Declaration Total Pages

a. ☐ Newly executed (original or copy)

b. ☒ Unexecuted for information purposes

c. ☐ Copy from a prior application (37 CFR 1.63(d))  
(for continuation/divisional with Box 17 completed)  
[Note Box 5 below]

i. ☐ DELETION OF INVENTOR(S)

Signed Statement attached deleting inventor(s)  
named in the prior application, see 37 CFR  
1.63(d)(2) and 1.33(b)

5. ☐ Incorporation By Reference (useable if Box 4c is checked)  
The entire disclosure of the prior application, from which a copy of the  
oath or declaration is supplied under Box 4c, is considered as being  
part of the disclosure of the accompanying application and is hereby  
incorporated by reference therein.

6. ☐ Microfiche Computer Program (Appendix)

7. Nucleotide and/or Amino Acid Sequence Submission  
(if applicable, all necessary)

a. ☐ Computer Readable Copy

b. ☐ Paper Copy (identical to computer copy)

c. ☐ Statement verifying identity of above copies

## ACCOMPANYING APPLICATION PARTS

8. ☐ Assignment Papers (cover sheet & document(s))

9. ☐ 37 CFR 3.73(b) Statement (when there is an assignee) ☐ Power of Attorney

10. ☐ English Translation Document (if applicable)

11. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations

12. ☐ Preliminary Amendment

13. ☒ Return Receipt Postcard (MPEP 503)  
(Should be specifically itemized)

14. ☐ Small Entity ☐ Statement filed in prior application  
Statement(s) Status still proper and desired

15. ☐ Certified Copy of Priority Document(s)  
(if foreign priority is claimed)

16. ☐ Other: \_\_\_\_\_

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. \_\_\_\_/\_\_\_\_

## 18. CORRESPONDENCE ADDRESS

☒ Customer Number or Bar Code Label

05514  
(Insert Customer No. or Attach bar code label here)

or ☐ Correspondence address below

NAME

Address

City

State

Zip Code

Country

Telephone

Fax



CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS		
	TOTAL CLAIMS (37 CFR 1.16(c))	46 -20 =	26	X \$ 18.00 =	\$ 468.00		
	INDEPENDENT CLAIMS (37 CFR 1.16(b))	6 -3 =	3	X \$ 78.00 =	\$ 234.00		
	MULTIPLE DEPENDENT CLAIMS (if applicable) (37 CFR 1.16(d))			\$260.00 =	\$ 260.00		
				BASIC FEE (37 CFR 1.16(a))	\$ 690.00		
Total of above Calculations = \$1,652.00							
Reduction by 50% for filing by small entity (Note 37 CFR 1.9, 1.27, 1.28).							
TOTAL = \$1,652.00							

19. Small entity status

- a. ☐ A Small entity statement is enclosed
- b. ☐ A small entity statement was filed in the prior nonprovisional application and such status is still proper and desired.
- c. ☐ Is no longer claimed.

20. ☒ A check in the amount of \$1,652.00 to cover the filing fee is enclosed.

21. ☐ A check in the amount of \$ \_\_\_\_\_ to cover the recordal fee is enclosed.

22. The Commissioner is hereby authorized to credit overpayments or charge the following fees to Deposit Account No. 06-1205:

- a. ☒ Fees required under 37 CFR 1.16.
- b. ☒ Fees required under 37 CFR 1.17.
- c. ☐ Fees required under 37 CFR 1.18.

**SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED**

NAME	Jack M. Arnold (25,823)
SIGNATURE	
DATE	March 3, 2000

IMAGE PROCESSING APPARATUS

The present invention relates to the field of time-lapse photography.

5

In time-lapse photography, a camera is periodically operated to photograph a subject, and then the recorded images are viewed, usually in the form of a "movie", over a period of time which is much shorter than the period over which the photographs were taken. This enables a slowly occurring change in the subject (which would normally occur at a speed too slow to see) to be studied at a faster than normal rate.

10

15

Considerable work has been carried out in the field of time-lapse photography to improve the functionality of time-lapse photographic equipment to give the user more control over the recording process, for example by controlling the exposure duration and exposure interval etc (see for example US 3790262, US 4466721 and US 4052126). However, existing systems still suffer from many problems, in particular inflexibility, difficulty of use and cost.

20

25

The present invention has been made with the above

problems in mind.

According to the present invention, there is provided a method or apparatus for generating image data for a time-lapse sequence of a scene in which image data recorded of the scene at different times is processed in such a way that the images need not have been recorded at the same position and with the same viewing direction.

This enables the photographer to revisit this scene at the required times without having to leave the camera in place in between, and, if required, to exercise full manual control of the camera to record the images.

The present invention also provides an image processing apparatus or method for processing input images of a scene recorded at different times and with different viewing characteristics in which processing is carried out to correct for the different viewing characteristics.

The present invention further provides an image processing apparatus or method in which image data defining images recorded of the scene at different times is processed to align the input images and to generate data for a time-lapse sequence at times between the times

at which the input images were recorded by calculating data defining synthetic images.

The present invention further provides instructions, both  
5 in recorded and signal form, for configuring a programmable processing apparatus to perform such a method or to become configured as such an apparatus.

Embodiments of the invention will now be described, by  
10 way of example only, with reference to the accompanying drawings in which:

Figure 1 is a block diagram showing an example of  
notional functional components within a processing  
15 apparatus of an embodiment of the invention;

Figures 2a, 2b, 2c and 2d show examples of input images  
of a scene recorded at different times to be processed by  
the apparatus shown in Figure 1 to generate a time-lapse  
20 sequence of images;

Figure 3 shows the processing operations performed by the  
apparatus in Figure 1;

25 Figure 4 shows the processing operations performed at

step S30 in Figure 3 to calculate transformations to register the input images;

Figure 5 shows the processing operations performed at step S40 in Figure 3 to generate interpolated image data; and

Figure 6 schematically shows the effect of registering a pair of input images at step S200 in Figure 5.

Referring to Figure 1, an embodiment of the invention comprises a processing apparatus 2, such as a personal computer, user input devices 4, such as a keyboard, mouse etc., and a display device 6, such as a conventional personal computer monitor.

The processing apparatus 2 is programmed to operate in accordance with programming instructions input for example as data stored on a data storage medium, such as disk 8, and/or as a signal 10 input to the processing apparatus, for example from a remote database, over a datalink (not shown) such as the Internet, and/or entered by a user via a user input device 4.

The programming instructions comprise instructions to

cause the processing apparatus 2 to become configured to process images of a scene taken at different times and from different viewing positions and/or viewing directions and to generate from this input image data image data defining a sequence of images for display which represents an evolving representation of the part of the scene which is present in all of the input images between the times at which the input images were recorded (that is, a so-called "time-lapse" sequence).

When programmed by the programming instructions, processing apparatus 2 effectively becomes configured into a number of functional units for performing processing operations. Examples of such functional units and their interconnections are shown in Figure 1. The illustrated units and interconnections in Figure 1 are, however, notional and are shown for illustration purposes only to assist understanding; they do not necessarily represent the exact units and connections into which the processor, memory etc. of the processing apparatus become configured.

Referring to the functional units shown in Figure 1, central controller 20 processes inputs from the user input devices 4, and also provides control and processing

for a number of the other functional units. Memory 22 is provided for use by central controller 20 and other functional units.

5 Image data store 28 stores the image data representing pictures of a scene input to the processing apparatus 2. Image data registration processor 30 and interpolator 32 perform processing of the image data stored in image data store 28 to generate image data defining images to be  
10 displayed in a "time-lapse" sequence of images. Image data generated by interpolator 32 is stored in the interpolated image data store 36.

15 Image renderer 40 reads image data from the image data store 28 and the interpolated image data store 36 and generates pixel data for images to be displayed. The pixel data generated by image renderer 40 is written to frame buffer 42 for display on the display device 6 at a video rate.

20 Output processor 44 generates data for output to another processing apparatus conveying sufficient information that the time lapse sequence of images produced by processing apparatus 2 can be generated from the data by  
25 the receiving apparatus.



Figures 2a, 2b, 2c and 2d show examples of input images to be processed by processing apparatus 2 in this embodiment.

5

Each of the images shown in Figures 2a, 2b, 2c and 2d comprises a picture of a scene (in this example, a garden) taken at different times. More particularly, the image shown in Figure 2a was recorded at the earliest time of the four images, the image shown in Figure 2b was recorded next, followed by the image shown in Figure 2c and finally the image shown in Figure 2d. As can be seen from Figures 2a, 2b, 2c and 2d, changes have occurred in the scene between the times at which the images were recorded (in this example, plants, shrubs and weeds have grown in the garden). Processing apparatus 2 is arranged to process the image data defining these input images to generate many more images representing the scene at times between those at which the input images were recorded. The input images and the generated images are then used to display a sequence of images to a user at video rate (or at a user-controlled speed, e.g. fast forward, reverse, pause etc.) showing how the scene changes over time (that is, in this example, how the plants, shrubs and weeds grow).

10

15

20

25

In this embodiment, it is not necessary for the input images to be recorded at equally spaced time intervals - that is, the time between the recording of the image shown in Figure 2a and the image shown in Figure 2b can be different from the time between the time at which the image shown in Figure 2b was recorded and the time at which the image shown in Figure 2c was recorded. In addition, the number of input images is not limited to four, and any number can be input, provided there are at least two.

In addition, as will be seen from Figures 2a, 2b, 2c and 2d, the input images, while showing substantially the same scene, are not necessarily recorded from the same viewing position or viewing direction. For example, referring to Figures 2a and 2b, and in particular the paved patio area 50, it will be seen that the image in Figure 2b was recorded at a viewing position further away from the fence 52 than the viewing position at which the image in Figure 2a was recorded, and with a viewing direction to the right of the viewing direction with which the image in Figure 2a was recorded.

It will be appreciated that, while the input images shown in the example of Figures 2a, 2b, 2c and 2d were recorded

over a period of several months, the input images could be recorded over any timescale.

Regarding the number of input images, and the time  
5 between the times at which they were recorded, the additional images generated by processing apparatus 2 will be more accurate (that is, will better resemble the true state of the scene at the time the generated image is supposed to represent) the closer the times at which  
10 the input images were recorded so that the changes in the scene between the input images are smaller. Similarly, the accuracy of the images generated by processing apparatus 2 will be higher if the input images are recorded under lighting conditions which are  
15 approximately the same when each image is recorded.

Figure 3 shows the processing operations performed in this embodiment by processing apparatus 2.

20 Referring to Figure 3, at step S10, the image data input to processing apparatus 2 defining the input images is stored in the image data store 28.

At step S20, central controller 20 causes a message to be  
25 displayed on display device 6 requesting the user to

enter data via the user input devices 4 defining the order in which the input images were recorded, the approximate time between the times at which the input images were recorded, and the required time for which the generated time-lapse sequence is to run when displayed to the user. Information input by the user in response to this request is stored in memory 22 at step S25.

At step S30, central controller 20 and image data registration processor 30 perform processing to calculate transformations suitable to register the input images.

Figure 4 shows the processing operations performed by central controller 20 and image data registration processor 30 in this embodiment to calculate the transformations at step S30.

Referring to Figure 4, at step S100, central controller 20 uses the information stored at step S25 defining the order of the input images to read the image data from image data store 28 defining the next pair of consecutive input images (this being the first and second input images in time of recording order the first time step S100 is performed) and displays the pair of input images on display device 6 via image renderer 40 and frame

buffer 42.

At step S110, central controller 20 causes a message to be displayed on display device 6 asking the user to  
5 identify four pairs of matching points (that is, the point in each displayed image which corresponds to the same real-world point) on each plane present in the displayed images, each point being a stationary point (that is, a point on an object which is not moving, an  
10 example of a moving object being a growing plant etc.). Preferably, the user is instructed to select the four points on each plane so that the points are spread through the area of the plane which is visible in both of the displayed images. The user then inputs this  
15 information by using an input device such as a mouse to identify a point in the first displayed image and the corresponding (matching) point in the second displayed image. Referring to Figures 2a and 2b by way of example, the patio 50 and lawn 54 lie in one plane, while the  
20 fence 52 lies in a second plane. Accordingly, at step S110, the user identifies four pairs of matching points on the patio 50 and/or lawn 54 (such as points 56a and 56b, 58a and 58b, 60a and 60b, and 62a and 62b) and four pairs of matching points on fence 52 (such as points  
25 58a and 58b, 60a and 60b, 64a and 64b, and 66a and 66b).

At step S120, the coordinates of the matching points identified by the user at step S110 are stored in memory 22.

5 At step S130, central controller 20 causes a message to be displayed on display device 6 requesting the user to identify the boundary of each plane in the images on which matching points were identified at step S110. In this embodiment, this is performed by the user moving a  
10 cursor around the boundary of each plane using a user input device 4. Referring to Figure 2 by way of example, the user defines the extent of the plane containing the patio 50 and lawn 54 by moving a cursor along the image edges 80, 82 and 84 and along the boundary 86 between the  
15 lawn 54 and the fence 52. To define the plane of the fence 52, the user moves the cursor along the image edges 88, 90 and 92 and along the boundary 86.

At step S140, central controller 20 stores the  
20 coordinates of the boundaries in each image input by the user at step S130.

At step S150, image data registration processor 30 reads  
25 the coordinates of the matching points stored at step S120 and calculates the respective transformation

for each plane which will register the four pairs of matching points in the images, that is, the transformation which will transform the four points in the second image of the pair so that they align with the four points in the first image of the pair. In this embodiment, image data registration processor 30 calculates each transformation by calculating the 3x3 matrix H which satisfies the following equation:

$$H \begin{pmatrix} x_i \\ y_i \\ 1 \end{pmatrix} = \begin{pmatrix} u_i \\ v_i \\ w_i \end{pmatrix} \quad (1)$$

where:

$(x_i, y_i)$  are the coordinates of the points in one input image and  $(x_i', y_i')$  are the coordinates of the corresponding (matched) points in the other input image ( $i = 1, 2, 3, 4$ ); and

$$x_i' = u_i/w_i \text{ and } y_i' = v_i/w_i.$$

Equation (1) can be written as:

$$\begin{pmatrix} h_0 & h_1 & h_2 \\ h_3 & h_4 & h_5 \\ h_6 & h_7 & h_8 \end{pmatrix} \begin{pmatrix} x_i \\ y_i \\ 1 \end{pmatrix} = \begin{pmatrix} x_i'w_i \\ y_i'w_i \\ w_i \end{pmatrix} \quad (2)$$

This gives:

$$h_0x_i + h_1y_i + h_2 = x'_i w_i \quad (3)$$

$$h_3x_i + h_4y_i + h_5 = y'_i w_i \quad (4)$$

$$h_6x_i + h_7y_i + h_8 = w_i \quad (5)$$

However,  $w_i$  can be eliminated to get 2 equations per point, as follows:

$$h_0x_i + h_1y_i + h_2 = x'_i (h_6x_i + h_7y_i + h_8) \quad (6)$$

$$h_3x_i + h_4y_i + h_5 = y'_i (h_6x_i + h_7y_i + h_8) \quad (7)$$

Rearranging gives:

$$h_0x_i + h_1y_i + h_2 - h_6x_ix'_i - h_7y_ix'_i - h_8x'_i = 0 \quad (8)$$

$$h_3x_i + h_4y_i + h_5 - h_6x_iy'_i - h_7y_iy'_i - h_8y'_i = 0 \quad (9)$$

Putting the four sets of two equations together gives:



$$\begin{pmatrix}
 x_1 & y_1 & 1 & 0 & 0 & 0 & -x_1 x'_1 & -y_1 x'_1 & -x'_1 \\
 0 & 0 & 0 & x_1 & y_1 & 1 & -x_1 y'_1 & -y_1 y'_1 & -y'_1 \\
 x_2 & y_2 & 1 & 0 & 0 & 0 & -x_2 x'_2 & -y_2 x'_2 & -x'_2 \\
 0 & 0 & 0 & x_2 & y_2 & 1 & -x_2 y'_2 & -y_2 y'_2 & -y'_2 \\
 x_3 & y_3 & 1 & 0 & 0 & 0 & -x_3 x'_3 & -y_3 x'_3 & -x'_3 \\
 0 & 0 & 0 & x_3 & y_3 & 1 & -x_3 y'_3 & -y_3 y'_3 & -y'_3 \\
 x_4 & y_4 & 1 & 0 & 0 & 0 & -x_4 x'_4 & -y_4 x'_4 & -x'_4 \\
 0 & 0 & 0 & x_4 & y_4 & 1 & -x_4 y'_4 & -y_4 y'_4 & -y'_4
 \end{pmatrix}
 \begin{pmatrix}
 h_0 \\
 h_1 \\
 h_2 \\
 h_3 \\
 h_4 \\
 h_5 \\
 h_6 \\
 h_7 \\
 h_8
 \end{pmatrix}
 = 0$$

(10)

The matrix M on the left is an 8x9 matrix but can be made square (9x9) by multiplying both sides by the transpose of M, as follows (note that, if there are more than four points, more rows can be added to M and M<sup>T</sup>M will still be a 9x9 matrix):

$$(M^T M) h = 0 \quad (11)$$

Equation (11) is in the well known Eigensystem form:

$$A x = \lambda x \quad (12)$$

with  $A = M^T M$  (a symmetric 9x9 matrix) and  $\lambda = 0$ . This cannot be solved analytically, but can be solved numerically in a number of ways. For example, in this embodiment, image data registration processor 30 and

central controller 20 are arranged to perform processing to solve the equation using the method described in Chapter 11 of "Numerical Recipes in C" ISBN 0-521-43108-5. More particularly, image data registration processor 30 and central controller 20 are arranged to use the routines "jacobi" and "eigsrt" in the above-referenced "Numerical Recipes in C" to calculate the eigenvectors ( $x$ 's) of  $A$  (in general there will be 9 distinct solutions) and to take the solution with the eigenvalue ( $\lambda$ ) closest to zero. This vector then contains the 9 elements of the matrix  $H$  that defines the required image transformation.

Referring again to Figure 4, at step S160, central controller 20 determines whether there is data stored in image data store 28 defining a further input image, and steps S100 to S150 are repeated until each pair of consecutive input images has been processed in the manner described above. More particularly, after processing the first and second input images, the second and third input images are processed in the same way, followed by the third and fourth input images etc.

Referring again to Figure 3, at step S40, image data registration processor 30, interpolator 32 and central

controller 20 perform processing to generate data defining images representing the state of the scene between the times at which the input images were recorded.

5

Figure 5 shows the processing operations performed at step S40.

10

Referring to Figure 5, at step S200, image data registration processor 30 applies the transformations calculated at step S150 to the input image data so as to register the next pair of input images (this being the first pair the first time step S200 is performed).

15

Figure 6 shows the effect of registering the input image shown in Figure 2b with the input image shown in Figure 2a.

20

Referring to Figure 5, the effect of registering the input images is to overlap the input image 100 representing the input image shown in Figure 2b with the input image 102 representing the input image shown in Figure 2a such that the matching points identified by the user at step S110 are aligned. In Figure 5, the parts of image 100 shaded with dots represent the parts of the

25

image shown in Figure 2b which are not present in the image shown in Figure 2a. Similarly, the parts of image 102 shaded with diagonal lines represent the parts of the image shown in Figure 2a which are not present in the image shown in Figure 2b. The unshaded portion 104 represents the area which is present in both the input image shown in Figure 2a and the input image shown in Figure 2b.

Referring again to Figure 5, at step S210, interpolator 32 and central controller 20 use the information stored in memory 22 at step S25 defining the approximate time between the times at which the input images were recorded and the required run time for the time-lapse sequence of images to be generated, to determine the number of intervening images in the time-lapse sequence between the pair of input images currently being considered, for which input image data is to be generated.

At step S220, interpolator 32 and central controller 20 generate image data defining each intervening image in the time-lapse sequence between the pair of input images currently being considered. More particularly, in this embodiment, for each pixel in the region where the input

images overlap after registration (that is, region 104 in Figure 6) interpolator 32 and central controller 20 perform interpolation between the value of the pixel in the first input image of the pair and the value of the pixel in the second input image of the pair. For each given pixel in the region 104, this interpolation is performed to generate a value for each intervening image in the time-lapse sequence in dependence upon the position of the intervening image in the sequence. In this embodiment, interpolator 32 and central controller 20 are arranged to calculate the pixel values using linear interpolation. The pixel values generated at step S220 are stored in the interpolated image data store 36.

At step S230, central controller 20 determines whether there is another input image to be processed, and steps S200 to S230 are repeated until each successive pair of input images have been processed in the manner described above. When these steps have been performed for all of the input images, image data has been generated and stored for images defining a time-lapse sequence.

Referring again to Figure 3, at step S50, central controller 20 and image renderer 40 use the image data

defining the input images stored in the image data store 28 and the image data defining the interpolated images stored in the interpolated image data store 36 to display the time-lapse sequence to the user on display device 6.

In this embodiment, image renderer 40 and central controller 20 are arranged to perform processing such that, when an input image is to be displayed as part of the time-lapse sequence, only the pixel values for the region 104 shown in Figure 6 in which the registered images overlap are read from image data store 28 and displayed on monitor 6. This prevents a change in image size when an input image is displayed followed by interpolated images.

In addition, or instead, output processor 44 outputs signals defining information from which the time-lapse sequence can be generated and displayed by a processing apparatus which receives the output signals. In this embodiment, output processor 44 is operable to output signals defining the image data of the input images stored in image data store 28 and the interpolated images stored in the interpolated image data store 36. In addition, output processor 44 is operable to output image

data from image data store 28 defining the input images,  
information defining the transformations calculated by  
image data registration processor 30 to register the  
input images, and information defining the type of  
5 interpolation performed by interpolator 32. In this way,  
a receiving apparatus which itself has an interpolator  
can reconstruct the image data for the time-lapse  
sequence, and it is unnecessary for output processor 44  
to output pixel data for each interpolated image.

10 A number of modifications are possible to the embodiment  
described above.

For example, in the embodiment above, image data  
15 registration processor 30 is arranged to calculate  
transformations to register the input images using  
matching features in the images identified by the user.  
However, image data registration processor 30 may itself  
be arranged to identify matching features in the input  
20 images using conventional image processing techniques,  
such as the feature matching techniques described in  
"Adaptive Least Squares Correlation: A Powerful Image  
Matching Technique" A.W. Gruen and S. Afr in Journal of  
Photogrammetry, Remote Sensing and Cartograhya 14(3) 1985  
25 pages 175-187 and/or the entropy matching techniques

described in "Alignment by Maximisation of Mutual Information", P. Viola and W. Wells in ICCV 5, June 20-23 1995, MIT, ISBN 0-8186-7042-8 pages 16-23. As will be appreciated by the skilled person, for some of these techniques, the closer the input images are taken to the same viewing position and same viewing direction, the easier it will be to perform matching and the more accurate the matches will be. In addition, image data registration processor 30 may be arranged to calculate the transformations on the basis of a combination of user identified matches and matches calculated itself using image processing techniques.

In the embodiment above, in steps S100-S160 (Figure 4), each input image is registered to the preceding input image using points matched in the pair of images by the user. Instead, all of the input images may be displayed to the user simultaneously and the user requested to match points which are present in all of the input images. In this way, each input image would then be registered to the first input image, rather than the preceding input image. Of course, this effect is also achieved if the user matches the same points between each pair of images (as illustrated in Figures 2a, 2b, 2c and 2d).



In the embodiment above, each plane in the input images is registered, which increases the accuracy of the interpolated image data. However, it is possible to register the images using matching points which lie on just one plane, or indeed matching points which do not necessarily lie on the same plane, with a subsequent loss of accuracy in the interpolated data.

In the embodiment above, each plane in the input images is registered using four pairs of matching points. By using four pairs of points, a full projective transformation can be calculated as described in the embodiment above, which will take account of all perspective effects in the images. However, it is possible to perform registration using fewer pairs of matching points. For example, using three pairs of matching points, an affine transformation could be calculated, in which case perspective effects in the images would be lost.

In the embodiment above, at step S200 (Figure 5), an input image is transformed to register it with the preceding image, and subsequently at step S220, interpolation is performed for each pixel in the overlapping region of the resulting registered input

images. However, as will be appreciated by the skilled person, it is possible to perform these steps together so as to transform and generate interpolated values for a pixel using a single mathematical operation.

5

In the embodiment above, at step S40 the image data for the intervening images in the time-lapse sequence is calculated for each pixel in each intervening image by linear interpolation between the value of the pixel in one input image and the value of the pixel in the following input image. This linear interpolation assumes that each input image will be displayed as one frame of the time-lapse video sequence. However, to ensure that the input images are more prominent in the time-lapse sequence, it is possible to repeatedly display each input image over a number of consecutive frames in the time-lapse sequence. In this case, the number of intervening images to be calculated by interpolation is reduced and the linear interpolation parameters are adjusted accordingly.

10  
15  
20

In the embodiment above, at step S40, the image data for intervening images in the time-lapse sequence is generated by linear interpolation. However, other types of interpolation could be performed.

25

In the embodiment above, output processor 44 is operable to output the pixel data of the input images together with the registration transformations and information defining the type of interpolation performed by interpolator 32. However, instead, output processor 44 may be arranged to output pixel data for a number of interpolated images together with information defining the interpolation so that further images can be generated by the receiving processor.

The apparatus in the embodiment above may be arranged to perform processing to update the time-lapse sequence if the user adds further input images, either to improve the accuracy of an existing sequence, or to extend an existing sequence using input images recorded at later times than those originally processed.

In the embodiment above, processing is performed by a computer using processing routines defined by programming instructions. However, some, or all, of the processing could be performed using hardware.

Other changes and modifications can be made without departing from the spirit and scope of the invention.

CLAIMS

1. Apparatus for processing image data defining a plurality of input images of a scene recorded at different times to generate data for defining a sequence of images conveying an evolving representation of the scene between the times at which the first and last input images were recorded, the apparatus comprising:

an image registerer for registering the input images; and

a pixel value interpolator for interpolating between the pixel values of the registered input images to generate pixel values for interpolated images for the image sequence.

2. Apparatus according to claim 1, wherein the image registerer comprises:

a transformation calculator for calculating transformations to transform the input images; and

a transformation applicator for using the transformations calculated by the transformation calculator to register the input images.

3. Apparatus according to claim 2, wherein the transformation calculator comprises a matcher to match

features in the input images and a calculator for calculating the transformations on the basis of the matched features.

5 4. Apparatus according to claim 2, wherein the transformation calculator comprises an input-signal processor for processing signals input by a user defining matching features in the input images to calculate the transformations.

10 5. Apparatus according to claim 1, wherein the pixel value interpolator is arranged to generate the pixel values for the interpolated images using linear interpolation.

15 6. Apparatus according to claim 1, wherein the pixel value interpolator is arranged to generate pixel values for interpolated images to be displayed in the image sequence in which each input image is to be displayed a plurality of consecutive times.

20 7. Apparatus according to claim 1, further comprising an overlap detector arranged to process input images registered by the image registerer to determine an area of overlap thereof, and wherein, the pixel value

interpolator is arranged to interpolate between the pixel values for pixels in the area of overlap only.

8. Image processing apparatus for generating data for  
5 a time-lapse sequence of images, comprising:

a transformation calculator for calculating  
transformations to register input images recorded with  
different viewing positions and/or viewing directions;  
and

10 an image data generator for using the input images  
and the calculated transformations to generate data for  
images to be displayed in the sequence.

9. A method of processing image data defining a  
15 plurality of input images of a scene recorded at  
different times to generate data for defining a sequence  
of images conveying an evolving representation of the  
scene between the times at which the first and last input  
images were recorded, the method comprising:

20 registering the input images; and

interpolating between the pixel values of the  
registered input images to generate pixel values for  
interpolated images for the image sequence.

25 10. A method according to claim 9, wherein the step of

registering the images comprises:

calculating transformations to transform the input images; and

using the transformations calculated in the transformation calculating step to register the input images.

11. A method according to claim 10, wherein, in the step of calculating transformations, features in the input images are matched and the transformations are calculated on the basis of the matched features.

12. A method according to claim 10, wherein, in the step of calculating transformations, signals input by a user defining matching features in the input images are processed to calculate the transformations.

13. A method according to claim 9, wherein, in the step of interpolating, the pixel values for the interpolated images are generated using linear interpolation.

14. A method according to claim 9, wherein, in the step of interpolating, pixel values are generated for interpolated images to be displayed in an image sequence in which each input image is to be displayed a plurality

of consecutive times.

15. A method according to claim 9, further comprising the step of processing registered input images to determine an area of overlap thereof, and wherein, in the step of interpolating, the pixel values for the interpolated images are generated for the area of overlap only.

16. A method according to claim 9, further comprising the step of generating a signal conveying data from which the sequence of images can be generated.

17. A method according to claim 16, wherein the signal comprises image data.

18. A method according to claim 16, further comprising the step of recording the signal either directly or indirectly.

19. A method according to claim 9, further comprising the step of displaying the sequence of images.

20. An image processing method for generating data for a time-lapse sequence of images, comprising:



calculating transformations to register input images recorded with different viewing positions and/or viewing directions; and

using the input images and the calculated transformations to generate data for images to be displayed in the sequence.

21. A storage device storing computer-useable instructions for causing a programmable processing apparatus to become operable to perform a method according to at least one of claims 9 to 20.

22. A signal conveying computer-useable instructions for causing a programmable processing apparatus to become operable to perform a method according to at least one of claims 9 to 20.

23. Apparatus for processing image data defining a plurality of input images of a scene recorded at different times to generate data for defining a sequence of images conveying an evolving representation of the scene between the times at which the first and last input images were recorded, the apparatus comprising:

registration means for registering the input images;

and

interpolating means for interpolating between the pixel values of the registered input images to generate pixel values for interpolated images for the image sequence.

5

~~24.~~ Image processing apparatus for generating data for a time-lapse sequence of images, comprising:

means for calculating transformations to register input images recorded with different viewing positions and/or viewing directions; and

10

means for using the input images and the calculated transformations to generate data for images to be displayed in the sequence.

ABSTRACTIMAGE PROCESSING APPARATUS

In an image processing apparatus 2, image data defining  
5 input images of a scene recorded at different times and  
with different viewing positions and viewing directions  
is processed to generate data defining a time-lapse  
sequence of images for display to a user showing an  
10 evolving representation of the scene between the times at  
which the first and last input images were recorded.  
Processing is carried out to register the input images by  
calculating the transformations which align matching  
features in the images, and interpolation is carried out  
15 between the pixel values of the registered images to  
generate pixel values for interpolated images in the  
time-lapse sequence. In this way, it is not necessary  
for the photographer to leave a camera in position to  
record images for a time-lapse sequence, and instead can  
20 return to the scene as and when required to record the  
images since the viewing position and viewing direction  
for the images do not need to be the same.

(FIGURE 1)

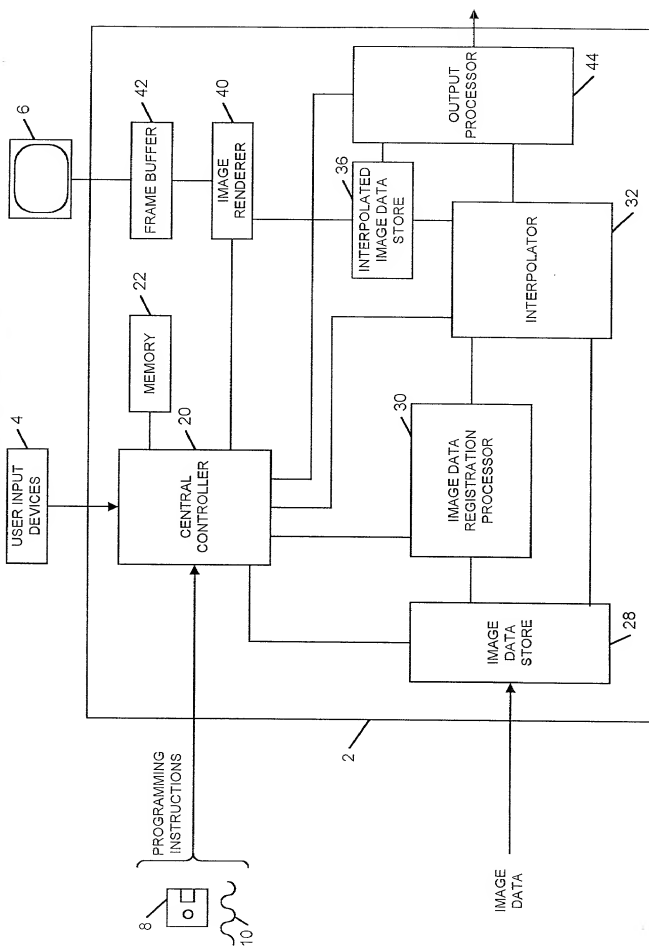
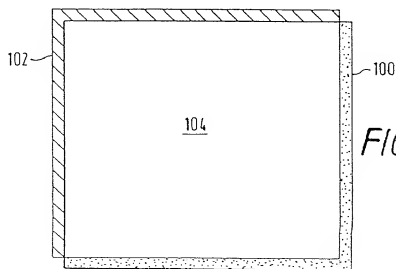



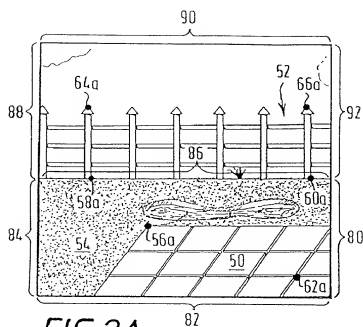


FIG. 1



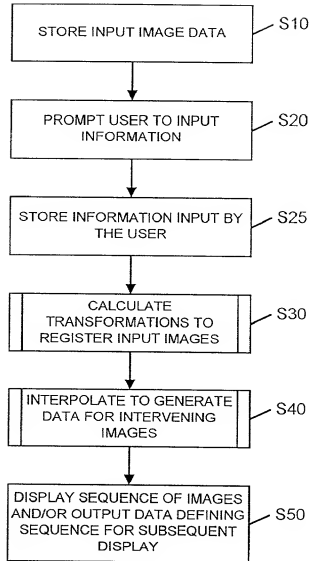


FIG. 3

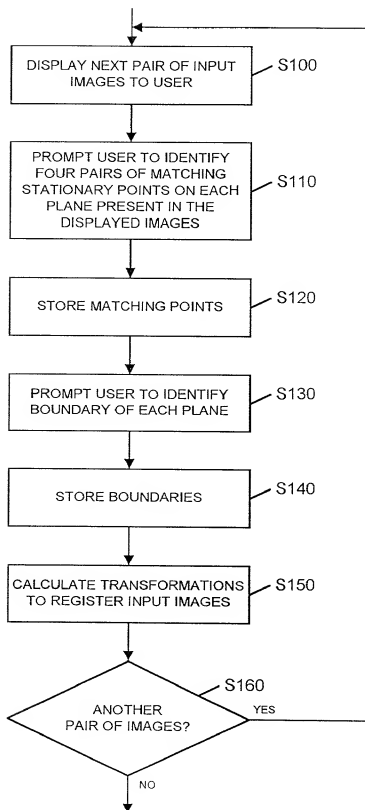


FIG. 4

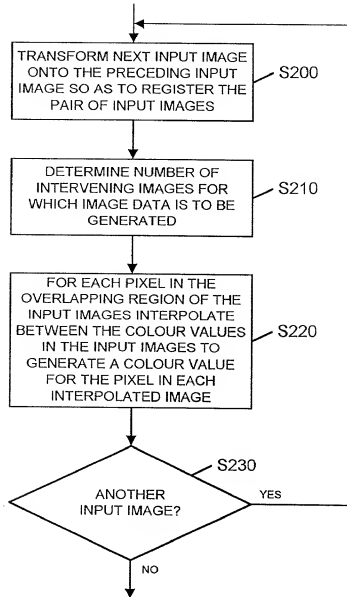


FIG. 5



COMBINED DECLARATION AND POWER OF ATTORNEY  
FOR PATENT APPLICATION  
(Page 1)

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled IMAGE PROCESSING APPARATUS

the specification of which ☒ is attached hereto ☐ was filed on \_\_\_\_\_ as United States Application No. or PCT International Application No. \_\_\_\_\_ and was amended on \_\_\_\_\_ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR §1.56.

I hereby claim foreign priority benefits under 35 U.S.C. §119(a)-(d) or §365(b), of any foreign application(s) for patent or inventor's certificate, or §365(a) of any PCT international application which designates at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate, or PCT international application having a filing date before that of the application on which priority is claimed:

Country	Application No.	Filed (Day/Mo./Yr.)	(Yes/No) Priority Claimed
United Kingdom	9906204.4	March 17, 1999	Yes

I hereby claim the benefit under 35 U.S.C. §120 of any United States application(s), or §365(c) of any PCT international application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of 35 U.S.C. §112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 C.F.R. §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

Application No.	Filed (Day/Mo./Yr.)	Status (Patented, Pending, Abandoned)
-----------------	---------------------	---------------------------------------

I hereby appoint the practitioners associated with the firm and Customer Number provided below to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, and direct that all correspondence be addressed to the address associated with that Customer Number:

**FITZPATRICK, CELLA, HARPER & SCINTO**  
**Customer Number: 05514**

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of First Joint Inventor RICHARD IAN TAYLOR

Inventor's signature \_\_\_\_\_

Date \_\_\_\_\_ Citizen/Subject of Great Britain

Residence c/o Canon Research Centre Europe Ltd., 2 Occam Court, Occam Road, Surrey, Research Park, Guilford, Surrey GU2 5YU, United Kingdom

Post Office Address c/o Canon Kabushiki Kaisha  
30-2 3-Chome, Shimomaruko, Ohta-ku, Tokyo, Japan